
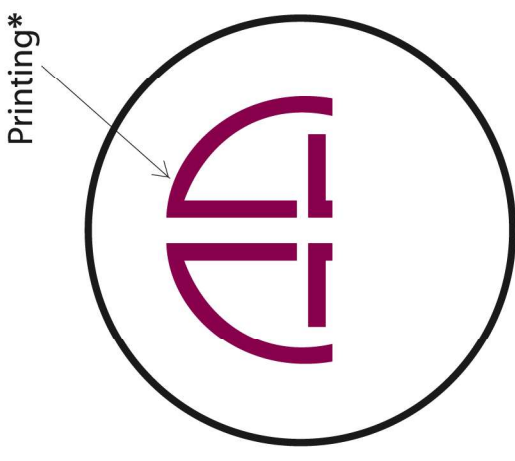


**Dimensions & Specifications
for Aluminium RoPP
(Roll seal Pilfer Proof) caps**

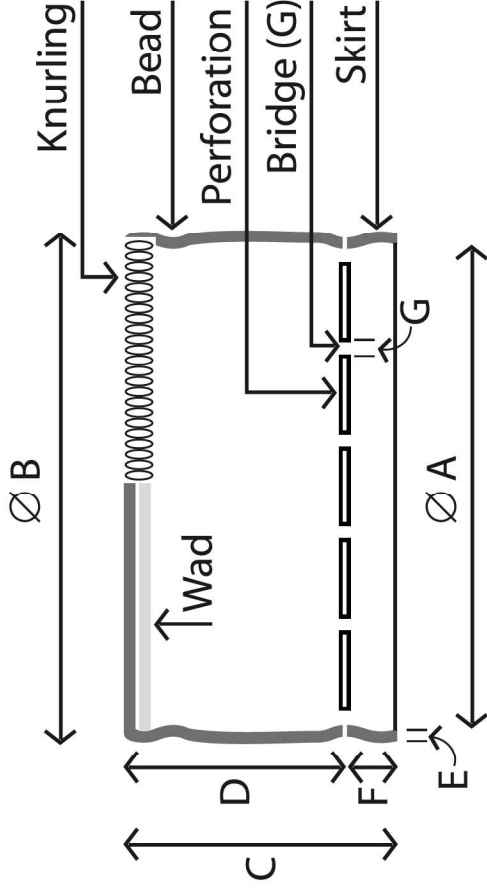

Diagrams Not to Scale

[All dimensions are in mm]

Sl.No.	Size	A ±0.2	B ±0.2	C ±0.4	E	F	G	No. of Bridges	Max. Opening Torque—N.cm
1	20	20.20	20.60	12.60	As per customer's requirement	3.80	0.70	7	100
2	22	22.30	22.50	15.10		3.80	0.80	7	110
3	25	25.30	25.50	16.50		4.25	0.80	7	125
4	28	28.20	28.50	17.90		4.40	0.80	8	140
5	31.5x18	31.30	31.50	17.90		4.80	0.80	9	160
6	38	38.25	38.50	16.10		4.60	0.80	10	185
7	53	53.30	53.60	18.40		5.50	0.90	13	250
8	28x38	28.20	28.50	37.40		20.80	0.80	8	150
9	29x35	29.20	29.60	34.60		5.50	0.80	8	150
10	31.5x24	31.25	31.60	24.00		4.50	0.80	9	160
11	25x29	25.30	25.50	29.00		16.60	1.05	7	

NOTE

1. Specifications are only indicative and subject to change as per customers' requirement.
2. Printing* shall be as per customer approved design.
3. Wads/seals—EP (expanded polyethylene), latex rubber, PVC lined cork, aluminium faced cork, in thickness of 1 mm to 2 mm, are used as per customers' requirement.